

ELD500 PRECISION LEAK DETECTOR

 **EDWARDS**





ELD500: your perfect partner in leak detection


Efficient and reliable performance.

The Edwards ELD500 fully automated leak detector is designed for fast, accurate leak detection in a wide range of applications and is fully mobile with an easy to use control interface.

- Low cost of ownership
- Ready to go mobile solution
- Customisable for any application
- High stability and accuracy



Applications

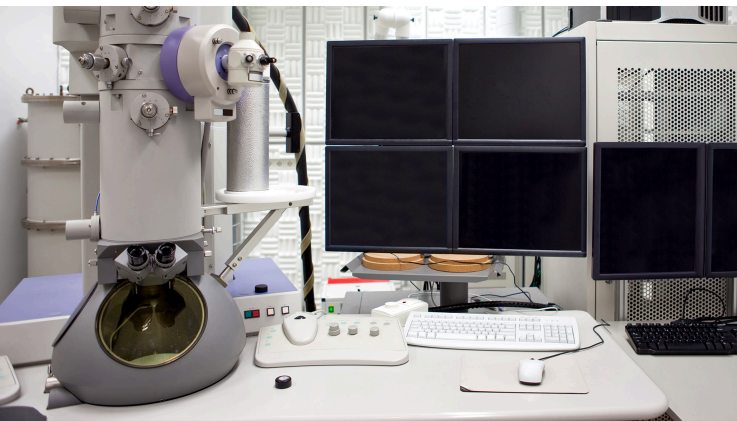

Analytical Instruments

- Electron microscopy
- Leak detection
- Mass spectrometry
- Surface analysis

Research and development

- Space simulation
- Cryogenic research
- Nanotechnology
- Coating systems





— Semiconductor

- Load lock
- Transfer
- Metrology
- Lithography
- PVD (physical vapour deposition)
- Plasma etching
- Implant source
- CVD (chemical vapour deposition)
- Flat panel display
- LED

— Industrial


- Industrial leak detection
- Electron beam welding
- Lamp and tube manufacturing
- Glass coating
- Brake line and air conditioning
- Refrigeration system manufacturers
- Heat treatment
- Power
- Vacuum furnaces



— High energy physics

- Beam lines
- Accelerators
- Fusion
- Laser evacuation

Features

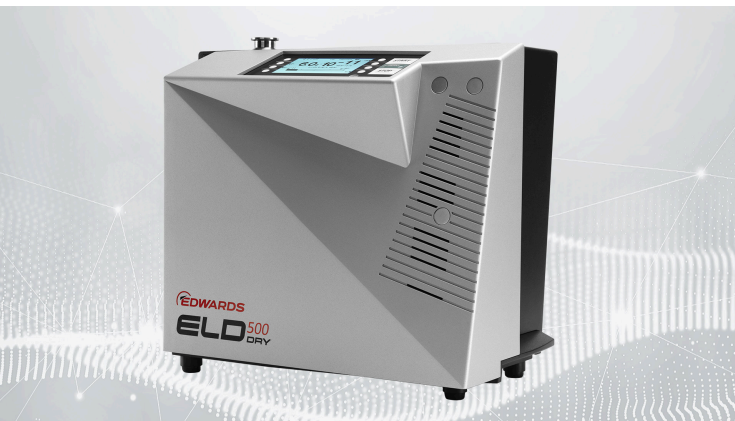

— Low cost of ownership

The proven design of the ELD500 leak detector, combined with low energy consumption, extended warranty and even longer life ion source, ensures exceptional low cost of ownership with no compromise on performance.

- High efficiency and low operating power consumption
- Highly reliable product with long maintenance intervals and low part replacement requirements
- Long life Ion source with a 30 month warranty

Ready to go mobile solution

... in under two minutes from power on. Users can benefit from simple pass/fail readings through to detailed analysis via the easy to read control interface, and due to the low weight and integrated carry handles, it is mobile enough to be bench top or trolley mounted.

- Large clear graphical display with direct access to key functions for incredible ease of use
- Truly portable with weight from only 30 kg and accessories including a trolley with space for an additional pump and a helium gas bottle
- The leak detector can be transported in any orientation and can be ordered with an optional transport case on wheels for true portability
- Rapid start up, from power on to first measurements in only 107 seconds



Customisable for any application

With three variants in the range: ELD500, ELD500 DRY and ELD500 FLEX, plus an extensive catalogue of accessories, the versatile ELD500 leak detector is ideal across all applications. At the push of a button the ELD500 can easily be set to work in either vacuum mode for precise measurement of leak rate or sniffer mode for identifying leak location.

All models feature a rugged turbomolecular pump optimised for the rigours of portable leak detection

Variants include:

- ELD500 version with an integrated oil sealed rotary vane pump
- ELD500 DRY version with an integrated helium optimised diaphragm pump
- ELD500 FLEX version without a primary pump, ideal for trolley mounting along with a larger primary pump such as an Edwards nXDS scroll pump

Flexible remote control options, features include

- Colour touch screen control with local graphical display
- Audible leak indication via loudspeaker or headphones
- Data logging to local memory or USB stick
- Wired or wireless models available
- Wireless model allows simultaneous control of up to 10 leak detectors




Partial flow kit for effective pump down of large or contaminated volumes

- Compatible with ELD500 and ELD500 FLEX variants
- Allows automatic calculation and display of actual leak rate
- Enables leak detection from atmospheric pressure

Extensive range of sniffer lines for accurate pin-pointing of leaks on pressurised systems

- Standard sniffer line enables operation up to 4m from the ELD500
- Longer sniffer lines of up to 50m can be used with the sniffer extender interface



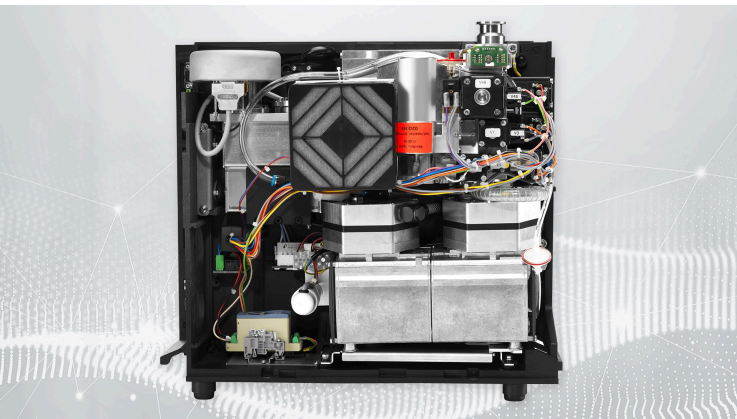

— High stability and accuracy

Excellent repeatable accuracy is achieved by the ELD500 through calibration with the integrated test leak source and high quality mass spectrometer. Whether being used on a production line, where consistent measurement repeatability is critical, or in a laboratory environment, typically requiring the measurement of extremely low leak rates, the ELD500 is your perfect partner.

- Automated, simple, high accuracy calibration possible via the integrated long life calibrated test leak
- Optional external calibrated test leaks available for applications requiring precision accuracy traceable to international and customer/company standards
- Excellent long term stability ensured by class leading 180 degree mass spectrometer
- Fastest recovery following helium contamination thanks to highest helium pumping speed in fine mode
- High sensitivity leak detection with measurement of leak rates for Helium of less than 5×10^{-12} mbar ls⁻¹ in vacuum mode and less than 1×10^{-7} mbar ls⁻¹ in sniffer mode

Technical data

Technical data

ELD500 Leak Detector	Units	ELD500	ELD500 DRY	ELD500 FLEX
Lowest detectable helium leak rate				
Vacuum operation	mbar ls ⁻¹	≤ 5 x 10 ⁻¹²	≤ 3 x 10 ⁻¹¹	≤ 5 x 10 ^{-12*}
Sniffer operation	mbar ls ⁻¹	≤ 1 x 10 ⁻⁷	≤ 1 x 10 ⁻⁷	≤ 1 x 10 ⁻⁷
Maximum measurable helium leak rate				
Vacuum operation	mbar ls ⁻¹	> 0.1	> 0.1	> 0.1
Measurement ranges	decades	12	12	11
Maximum permissible inlet pressure	mbar	15	15	15
Pumping speed during pumpdown, 50 Hz/60 Hz	m ³ h ⁻¹	2.5/3	1.6/1.8	N/A
Helium pumping speed in the fine mode	ls ⁻¹	3.1	3.1	3.1
Time constant for leak rate signal	s	< 1	< 1	< 1
Time until ready for operation	mm	≤ 2	≤ 2	≤ 2
Power consumption	VA	420	350	200
Inlet flange		NW25	NW25	NW25
Protection class	IP	40	40	40
Dimensions (WxHxD)	mm	495 x 456 x 314	495 x 456 x 314	495 x 456 x 314
Weight	kg	40	35.5	30

* Backing pump dependent

Ordering information

Leak detectors, Accessories & Extended Warranty

Product Description	Order Number
Leak detectors	
ELD500, 200-240V, 50/60Hz	D13510903
ELD500, 100-120V, 50/60Hz	D13510904
ELD500, 100-120V, 60Hz	D13510906
ELD500 DRY, 200-240V, 50/60Hz	D13520903
ELD500 DRY, 100-120V, 50/60Hz	D13520904
ELD500 DRY, 100-120V, 60Hz	D13520906
ELD500 FLEX, 100-240V, 50/60Hz	D13530000
Accessories	
ELD500 RC - Wired - Remote control	D13550100
ELD500 RC - Wireless - Remote control	D13550110
Extension cable for remote control, 10 m	14022
ELD500 RC - Wireless - Extra transmitter	D13550130
ELD500 SL - Standard sniffer line 4m	D13550300
ELD500 SL - Extended SL Interface	D13550200
ELD500 SL - Standard sniffer line 5m	14008
ELD500 SL - Standard sniffer line 20m	14009
ELD500 SL - Standard sniffer line 50m	12183
Partial Flow System ELD 200-240V	D13550403
Partial Flow System ELD 100-120V	D13550406
ELD500 Transport Case	D13550500
ELD500 Cart without Ebox	D13550600
Test gas spray gun, with hose	16555
Internal test leak TL7	D14023
Customizable test leak, screw-in sleeve	D14300
Test leak TL4-6 with helium reservoir	D15580
Extended Warranty	
From 18 months to 3 years	EW3AA5100

Leak detectors, Accessories & Extended Warranty

Product Description	Order Number
From 18 months to 5 years	EW5AA5100



3601 0415 01 - Jan 2025. All rights reserved.
Edwards and the Edwards logo are trademarks of Edwards Limited. Whilst we make every effort to ensure that we accurately describe our products and services, we give no guarantee as to the accuracy or completeness of any information. Edwards Ltd, registered in England and Wales No. 6124750, registered office: Innovation Drive, Burgess Hill, West Sussex, RH15 9TW, UK.