

# INNOVATIVE HDHT-TYPE HEADSPACE SYRINGE FOR HIGH TEMPERATURE APPLICATIONS

## For PAL COMBI-*xt*<sup>®</sup> Headspace Autosampler



Hamilton introduces a new headspace syringe featuring a unique needle attachment in combination with the High Dynamic (HD) plunger designed specifically for PAL COMBI-*xt* Headspace Autosamplers.

Conventional headspace syringe needles are attached to the syringe glass body using glue (cement). Common problems are detached needles or ghost peaks due to low chemical inertness of the cement to solvents or limited resistance to higher temperature.

Hamilton addresses these problems with the new Glue-Free High Temperature (HDHT) headspace syringe.

Modern GC headspace analysis requires injecting over large temperature ranges. Ordinary headspace syringes on the market use a rubber O-ring sealed plunger which has a limited sealing performance at high temperatures due to varying thermal expansion between the different materials. The high dynamic HD-type syringe employs a unique spring in the plunger tip which compensates for the materials' different expansion coefficients, creating a better seal over a larger temperature range, improving syringe lifetime.

The High Dynamic (HD) plunger is optimized for high throughput and has set the new standard for headspace syringes.

### Benefits of Hamilton HDHT Headspace Syringes

- The needle attachment is chemically inert, eliminating detached needles due to contact with organic and chlorinated solvents
- Needle attachment minimizes ghost peaks
- Temperature stability up to 200°C means a wider range of sample components can be analyzed
- Spring-in-plunger design creates a dynamic seal between the plunger tip and the inside of the glass barrel for leak-free operation
- Increased lifetime over traditional headspace syringes
- Improved accuracy and reproducibility of GC headspace analysis

### Fluid Paths of Hamilton HDHT Headspace Syringes

- Pure PTFE
- Inert glass
- Inert stainless steel



## New HDHT-Type Syringe Design

Patent pending




Glue-free needle attachment

**Headspace Applications**  
up to  
**200°C**

## HD-Type plunger design

Patented

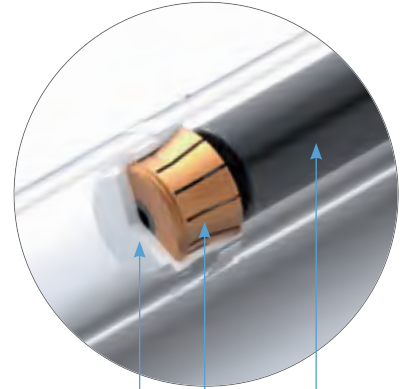

PTFE plunger tip  
Plunger  
Compression spring

### Hamilton HDHT-type syringes are specially designed for the PAL COMBI-xt® GC autosampler sold under the following brands

- AB SCIEX™
- Agilent
- Alpha M.O.S.
- Antek
- Bruker
- Dionex®
- GE®
- GERSTEL®
- GL Sciences
- Lauda
- LEAP Technologies
- MicroCal™
- MPS
- PERICHROM
- PerkinElmer®
- Shimadzu
- SOTAX
- Thermo Scientific®
- Waters®
- Zoex



### Ordering Information

Hamilton Part Number	Volume	Description	Gauge	Point Style
209681	1.0 mL	SYR 1001 HDHT (23/5) Headspace	23	5
209683	2.5 mL	SYR 1002 HDHT (23/5) Headspace	23	5
209685	5.0 mL	SYR 1005 HDHT (23/5) Headspace	23	5
209682	1.0 mL	SYR 1001 HDHT (26/5) Headspace	26	5
209684	2.5 mL	SYR 1002 HDHT (26/5) Headspace	26	5
209686	5.0 mL	SYR 1005 HDHT (26/5) Headspace	26	5

All syringes listed feature a Glue-Free (GF) needle termination with a High Dynamic (HD) plunger. Point style 5: needle with side hole tip

For more information on these and other Hamilton syringes, including information on terminations, point styles, gauges, and other specifications, please visit [www.hamiltoncompany.com/syringes](http://www.hamiltoncompany.com/syringes)



© 2023 Hamilton Company. All rights reserved. All trademarks are owned and/or registered by Hamilton Company in the U.S. and/or other countries. Lit. No. L20095 Rev. B - 09/2023

**HAMILTON**

Web: [www.hamiltoncompany.com](http://www.hamiltoncompany.com)  
USA: 800-648-5950  
Europe: +40-356-635-055

**Hamilton Americas & Pacific Rim**  
Hamilton Company Inc.  
4970 Energy Way  
Reno, Nevada 89502 USA  
Tel: +1-775-858-3000  
Fax: +1-775-856-7259  
[sales@hamiltoncompany.com](mailto:sales@hamiltoncompany.com)

To find a representative in your area, please visit: [www.hamiltoncompany.com/contacts](http://www.hamiltoncompany.com/contacts)

**Hamilton Europe, Asia & Africa**  
Hamilton Central Europe S.R.L.  
str. Hamilton no. 2-4  
307210 Giarmata, Romania  
Tel: +40-356-635-055  
[contact.lab.ro@hamilton-ce.com](mailto:contact.lab.ro@hamilton-ce.com)

